



Power supplies catalogue

ADLS

12 V / 60 W — 120 W



Features:

- Constant voltage design
- Universal AC input / Full range
- Protections:
 - Short circuit
 - Overload
 - Over voltage
 - Over temperature
- Cooling by free air convection
- Slim case size
- Low price

Model	ADLS-60-12	ADLS-80-12	ADLS-100-12	ADLS-120-12
Rated Voltage	12V	12V	12V	12V
Rated Current	5A	6.7A	8.5A	10A
Rated Power	60W	80W	102W	120W
Voltage Adjustment	10.8 ÷ 13.2V	10.8 ÷ 13.2V	10.8 ÷ 13.2V	10.8 ÷ 13.2V
Dimensions [L × W × H]	160 × 41 × 32mm	160 × 41 × 32mm	188 × 46 × 34mm	188 × 46 × 34mm
Weight	0.18kg	0.19kg	0.24kg	0.24kg



ADLS

12 V / 150 W — 360 W



Features:

- Constant voltage design
- Universal AC input / Full range
- Protections:
 - Short circuit
 - Overload
 - Over voltage
 - Over temperature (except ADLS-200-12)
- Cooling by free air convection (except ADLS-360-12, this model has forced air cooling by built-in DC fan)
- Slim case size
- Low price

Model	ADLS-150-12	ADLS-200-12	ADLS-240-12	ADLS-360-12
Rated Voltage	12V	12V	12V	12V
Rated Current	12.5A	17A	20A	30A
Rated Power	150W	204W	240W	360W
Voltage Adjustment	11.4 ÷ 13.2V	10.8 ÷ 13.4V	11.4 ÷ 13.2V	10.5 ÷ 13.5V
Dimensions [L × W × H]	200 × 58 × 36mm	223 × 68 × 40mm	223 × 71.5 × 36mm	223 × 68 × 40mm
Weight	0.37kg	0.50kg	0.54kg	0.55kg



ADL


12 V / 15 W — 60 W



Features:

- Constant voltage design
- Universal AC input / Full range
- Protections:
 - Short circuit
 - Overload
 - Over voltage
- Cooling by free air convection
- Compact size
- Low price

Model	ADL-15-12	ADL-25-12	ADL-40-12	ADL-60-12
Rated Voltage	12V	12V	12V	12V
Rated Current	1.25A	2.1A	3A	5A
Rated Power	15W	25W	36W	60W
Voltage Adjustment	10.8 ÷ 13.2V	10.8 ÷ 13.2V	11.5 ÷ 13V	10.5 ÷ 13V
Dimensions [L × W × H]	77 × 47 × 20mm	85 × 58 × 37mm	85 × 58 × 37mm	85 × 58 × 37mm
Weight	0.095kg	0.12kg	0.13kg	0.14kg

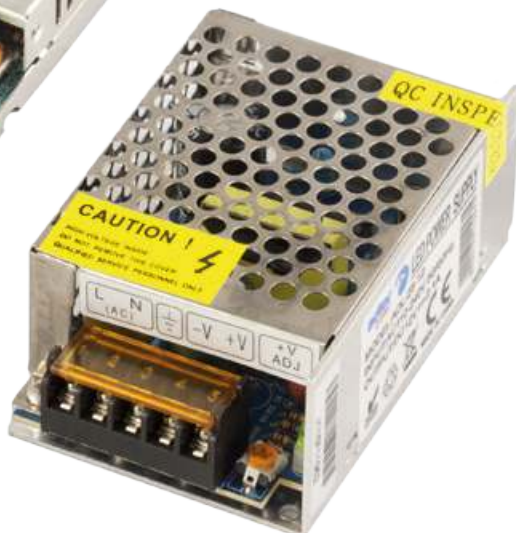



Features:

- Constant voltage design
- Universal AC input / Full range (ADL-150-12)
- European AC input / Full range (ADL-200-12S & ADL-500-12)
- Protections:
 - Short circuit
 - Overload
 - Over temperature (ADL-200-12S)
- Cooling by free air convection
- Compact size
- Low price

Model	ADL-150-12	ADL-200-12S	ADL-500-12
Rated Voltage	12V	12V	12V
Rated Current	12.5A	16.5A	41.6A
Rated Power	150W	198W	500W
Voltage Adjustment	10.8 ÷ 13.2V	10.8 ÷ 13.2V	10.8 ÷ 13.2V
Dimensions [L × W × H]	199 × 98 × 42mm	160 × 98 × 42mm	240 × 125 × 65mm
Weight	0.51kg	0.45kg	1.40kg



AD12

12 V / 30 W — 60 W

Features:

- Constant voltage design
- Universal AC input / Full range
- Protections:
 - Short circuit
 - Overload
 - Over voltage
 - Over temperature
- Cooling by free air convection
- Compact size
- Low price



Model	AD12-2501	AD12-3751	AD12-5001
Rated Voltage	12V	12V	12V
Rated Current	2.5A	3.75A	5A
Rated Power	30W	45W	60W
Dimensions [L × total L × W × H]	202 × 220 × 30 × 21mm	222 × 240 × 40.5 × 23mm	152 × 180 × 71.5 × 38mm
Weight	0.32kg	0.40kg	0.85kg



NOTES

Place for your notes

